



Chromebox Mini

*An Enterprise Ready Solution
Running on Chrome.*

Small, but powerful: the smallest enterprise-ready Chromebox today, designed for the signage, POS, corporate, and kiosk markets. Empowering customers with ease of experience and greater control of in-store engagement.


The AOPEN Chromebox Mini is a highly reliable and powerful enterprise grade solution that operates 24/7 under tough conditions (up to 40°C). It sets itself apart from any Chromebox, being the most flexible of its kind. The small size combined with strong computing power creates the perfect solution for any commercial or corporate environment. The Chromebox Mini ensures a speedy, simple, secure and scalable solution.

Deployment and management of the devices has never been easier using Chrome Device Management. This easy and powerful tool allows users to remotely manage entire fleets of AOPEN Commercial Chrome devices.

The advantages of the Chromebox Mini:

- Tough and tamperproof design for 24/7 operability in commercial and public environments (<40°C/104°F).
- Smallest chrome form factor available in the market today, for easy integrations.
- A cost-effective solution for lower TCO.
- The solid-state and fanless design ensure a first-rate performance in rigid environment.
- AC Power Auto Recovery (APAR).
- Included dual band antenna offers a wide reach.
- Kiosk and POS device extensions via commercial ports.
- Optional Chrome Device Management on request to save valuable time, costs on installation, programming and maintenance.



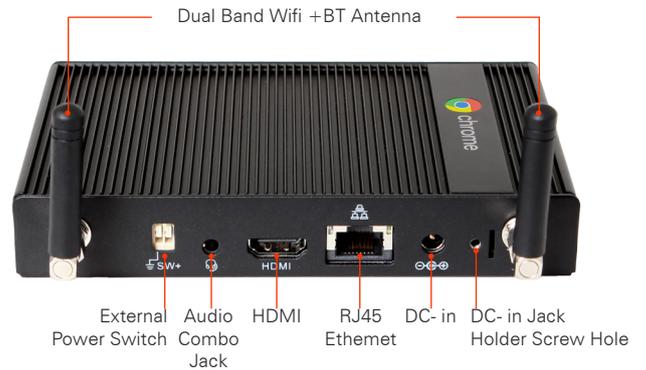

Chromebox Mini

Specifications			
Features	The most flexible Enterprise Ready Grade Solution in the market today. Running on the Chrome OS. APAR (AC Power Auto Recovery)	Front Panel I/O	USB 2.0 port support BC1.2 x 3
Commercial Features	Operating Shock 8G, Operating Temperature up to 40°C/104°F		Power Button with LED x 1
Operating System	Chrome OS	Real Panel I/O	Power switch x 1
CPU	Rockchip RK3288C Quad-Core Cortex-A17 turbo up to 1.8GHz		HDMI x 1
Graphics	ARM Mali-T764 MP4 GPU clocked at 600 MHz		Ethernet RJ45 x 1
Memory	Dual Channel 4GB LPDDR3 Memory down design		Audio Combo Jack x 1 (Line out/Line in)
Storage	EMMC 5.0 16 GB		Antenna hole x 2
LAN	Gigabit 10/100/1000 Mbps	Environment	Wide Votage Range DC input DC 15~50V power inlet Jack x 1
Form Factor	Dimensions (WxDxH) 146 x 93 x 24 mm 5.75 x 3.8 x 0.94 inch		Operating Temperature 0°C ~ 40°C 32°F ~ 104°F
	Net Weight 403g		Storage Temperature -20°C ~ 60°C -7°F ~ 140°F
	Color Black		Relative Humidity 90%@50°C
Display	GPU with ARM Mali-T764 GPU, with TE, ASTC, AFBC technology (Images & Basic HTML only). Limited Video Playback Up to 1080p display resolution Image enhancement processor	Accessories	Vibration Random 2Grms
Audio	Audio with Maxim MX98090	Optional Accessories	User Manual Power Cord/ Power Cord Clip 40W AC to DC 19V Adapter 2.4/5G dual band Antenna (x 2)
Networking	Giga LAN Realtek RTL8211E-VB with LED indicate Wi-Fi+ Bluetooth; WiFi 802.11 b/g/n/ac + BT4.0	Warranty	POS peripheral connectors: Mounting Rails
			The Chromebox Mini comes with a 1 year warranty. Extended warranty optional for 3 years.