



# AOPEN

Bright Ideas Connected

## Digital Engine®





## Professional 6 Output Video Wall Player **DEV7610-X6**

The new DEV7610-X6 is a high-end player for multi-screen video wall solutions. The new housing with an aluminium front was designed for unobtrusive installation in commercial environments. Graphics are provided by an AMD Radeon™ E8870 GPU with six mini DisplayPort connections, while an Intel® Core™ CPU powers both the onboard DisplayPort 1.2 and HDMI 1.4 ports.

DEV7610-X6 features:

- + 8th Generation Intel Core platform with desktop CPU
- + AMD E8870 GPU module to implement video wall application
- + Compatibility to support HDD and SSD storage device

# DEV7610-X6

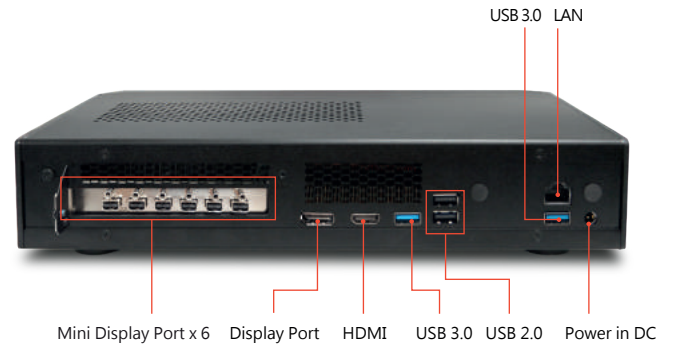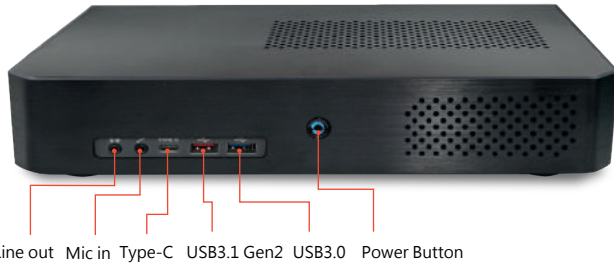

| Model name      |                  | DEV7610-X6  |
|-----------------|------------------|---|
| Dimension       | W x H x D (mm)   | 300 x 212 x 60 mm   |
|                 | W x H x D (inch) | 11.81 x 8.34 x 2.36 inch                                  |
| Volume          |                  | 3.8L  |
| Weight          |                  | 1.4 kgs/3.09 lbs  |
| CPU             | Socket           | LGA1151   |
|                 | Type             | Intel® Pentium/Celeron/<br>8th Generation Core i3/5/7 CPU |
| Chipset         |                  | Intel® B360   |
| Memory          | Channel          | Dual Channel  |
|                 | Type             | DDR4 SO-DIMM x 2  |
|                 | Data rate        | 2400/2666   |
|                 | Max Memory       | 32G   |
| Graphics        | Chip             | -   |
| Expansion slot  |                  | M.2 2230 x 1  |
|                 |                  | M.2 2242/2280 x 1   |
|                 |                  | M.2 2280 x 1  |
| Audio           | Type             | Realtek ALC269 5.1 Channel HDA Codec                      |
|                 | Channel          | Stereo  |
| LAN             |                  | 10/100/1000 Mbps  |
| Storage Bay     | 2.5" SATA        | x 1   |
|                 | M.2 2280         | x 2   |
| Front Panel I/O | USB 2.0 Port     | -   |
|                 | USB 3.0 Port     | x 1   |
|                 | USB 3.1 Gen2     | x 1   |
|                 | USB Type C       | x 1   |

| Rear Panel I/O        | DC Jack                 | x 1                     |     |
|-----------------------|-------------------------|-------------------------|-----|
|                       | HDMI 1.4 Port           | x 1                     |     |
|                       | USB 2.0 Port            | x 2                     |     |
|                       | USB 3.0 Port            | x 2                     |     |
|                       | Display Port            | x 1                     |     |
|                       | RJ 45 LAN Jack          | x 1                     |     |
|                       | Mini Display Port       | x 6 (Discrete Graphics) |     |
|                       | Audio Set               | Line-out                | x 1 |
|                       |                         | Mic-in                  | x 1 |
|                       | Antenna Holes           | x 2                     |     |
|                       | Kensington Lock Hole    | -                       |     |
|                       | COM Port                | x 2 (Optional)          |     |
|                       | Others                  | -                       |     |
|                       | CPU Thermal Module      | AOPEN Thermal Module    |     |
| WatchDog Timer        | N/A                     |                         |     |
| Power Adapter         | 180W adapter            |                         |     |
| Input Voltage         | 19.5V, 9.23A            |                         |     |
| Environment           |                         |                         |     |
| MTBF                  | 50,000hrs               |                         |     |
| Operating Temperature | 0 ~45°C (32 ~ 104°F)    |                         |     |
| Storage Temperature   | -20 ~ 60°C (-4 ~ 140°F) |                         |     |
| Relative Humidity     | 95% RH                  |                         |     |

Support :



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.