

EZMarquee 1L10C and 2L10C Specs (Indoor)



EZMR-1L10C
EZMRH-1L10C



EZMR-2L10C
EZMRH-2L10C




EZMT-1L10C



EZMT-2L10C

EZMarquee Model Specifications								
Part Number	EZMR-1L10C	\$379.00	EZMT-1L10C	\$489.00	EZMR-2L10C	\$599.00	EZMT-2L10C	\$699.00
	EZMR-1L10C-E	\$478.00	EZMT-1L10C-E	\$588.00	EZMR-2L10C-E	\$698.00	EZMT-2L10C-E	\$798.00
	EZMR-1L10C-D	\$478.00	EZMT-1L10C-D	\$588.00	EZMR-2L10C-D	\$698.00	EZMT-2L10C-D	\$798.00
	EZMR-1L10C-P	\$518.00	EZMT-1L10C-P	\$628.00	EZMR-2L10C-P	\$728.00	EZMT-2L10C-P	\$828.00
	EZMRH-1L10C	\$749.00			EZMRH-2L10C	\$1199.00		
	EZMRH-1L10C-E	\$959.00			EZMRH-2L10C-E	\$1399.00		
	EZMRH-1L10C-D	\$959.00			EZMRH-2L10C-D	\$1399.00		
	EZMRH-1L10C-P	\$1039.00			EZMRH-2L10C-P	\$1459.00		
Display Type for Indoor	RED LED		TRI-Color LED		RED LED		TRI-Color LED	
Display Type for “H”	RED Sunlight Readable 8000 nits				RED Sunlight Readable 8000 nits			
Specification	1 Line of 10 Char (2”)				2 Lines of 10 Char (2”)			
Max. Viewable Distance	100 Feet with 2” Characters				200 Feet with 4” Characters			
Power Consumption	8 watts		14 watts		15 watts		28 watts	
Agency Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 12							
Operating Temperature	0° to 60° C Ambient							
Storage Temperature	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference	NEMA ICS 2-230 Showering Arc Test							
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Communications	Port 1 RS232; Port 2 RS422/485							
External Dimensions	18.9” x 4.8” x 2.8” (479.25 x 121.43 x 69.85mm)				18.9” x 6.2” x 2.8” (479.25 x 156.13 x 69.85mm)			
Weight	2.8 lbs		3 lbs		5 lbs		5.2 lbs	

EZMarquee 1L10C and 2L10C Specs (Outdoor)

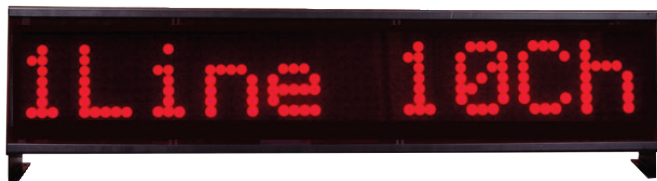

EZMR-1L10C-OUT
EZMRH-1L10C-OUT



EZMR-2L10C-OUT
EZMRH-2L10C-OUT



EZMT-1L10C-OUT



EZMT-2L10C-OUT

EZMarquee

EZMarquee Model Specifications

EZMarquee Model Specifications								
Part Number	EZMR-1L10C-OUT	\$749.00	EZMT-1L10C-OUT	\$978.00	EZMR-2L10C-OUT	\$1199.00	EZMT-2L10C-OUT	\$1398.00
	EZMR-1L10C-E-OUT	\$959.00	EZMT-1L10C-E-OUT	\$1179.00	EZMR-2L10C-E-OUT	\$1399.00	EZMT-2L10C-E-OUT	\$1599.00
	EZMR-1L10C-D-OUT	\$959.00	EZMT-1L10C-D-OUT	\$1179.00	EZMR-2L10C-D-OUT	\$1399.00	EZMT-2L10C-D-OUT	\$1599.00
	EZMR-1L10C-P-OUT	\$1039.00	EZMT-1L10C-P-OUT	\$1259.00	EZMR-2L10C-P-OUT	\$1459.00	EZMT-2L10C-P-OUT	\$1659.00
	EZMRH-1L10C-OUT	\$1139.00			EZMRH-2L10C-OUT	\$1799.00		
	EZMRH-1L10C-E-OUT	\$1439.00			EZMRH-2L10C-E-OUT	\$2099.00		
	EZMRH-1L10C-D-OUT	\$1439.00			EZMRH-2L10C-D-OUT	\$2099.00		
	EZMRH-1L10C-P-OUT	\$1559.00			EZMRH-2L10C-P-OUT	\$2189.00		
Outdoor Model	RED LED		TRI-Color LED		RED LED		TRI-Color LED	
High-bright Model	RED Sunlight Readable 8000 nits				RED Sunlight Readable 8000 nits			
Specification	1 Line of 10 Char (2")				2 Lines of 10 Char (2")			
Max. Viewable Distance	100 Feet with 2" Characters				200 Feet with 4" Characters			
Power	8 watts		14 watts		15 watts		28 watts	
Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 4X							
Operating Temp.	0° to 60° C Ambient							
Storage Temp.	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference	NEMA ICS 2-230 Showering Arc Test							
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Comm.	Port 1 RS232; Port 2 RS422/485							
External Dim.	18.9" x 4.8" x 2.8" (479.25 x 121.43 x 69.85mm)				18.9" x 6.2" x 2.8" (479.25 x 156.13 x 69.85mm)			
Weight	2.8 lbs		3 lbs		5 lbs		5.2 lbs	

EZMarquee 1L20C and 1L40C Specs (Indoor)



1 Line of 2", 20 Cha

EZMR-1L20C
EZMRH-1L20C



1 Line of 2", 20 Cha

EZMT-1L20C

1 Line of 2", 40 Characters per line

EZMR-1L40C
EZMRH-1L40C

1 Line of 2", 40 Characters per line

EZMT-1L40C

EZMarquee Model Specifications

EZMarquee Model Specifications								
Part Number	EZMR-1L20C	\$549	EZMT-1L20C	\$649	EZMR-1L40C	\$879	EZMT-1L40C	\$989
	EZMR-1L20C-E	\$648	EZMT-1L20C-E	\$748	EZMR-1L40C-E	\$978	EZMT-1L40C-E	\$1088
	EZMR-1L20C-D	\$648	EZMT-1L20C-D	\$748	EZMR-1L40C-D	\$978	EZMT-1L40C-D	\$1088
	EZMR-1L20C-P	\$678	EZMT-1L20C-P	\$778	EZMR-1L40C-P	\$1088	EZMT-1L40C-P	\$1138
	EZMRH-1L20C	\$1099			EZMRH-1L40C	\$1759		
	EZMRH-1L20C-E	\$1299			EZMRH-1L40C-E	\$1959		
	EZMRH-1L20C-D	\$1299			EZMRH-1L40C-D	\$1959		
	EZMRH-1L20C-P	\$1359			EZMRH-1L40C-P	\$2019		
Display for Indoor	RED LED		TRI-Color LED		RED LED		TRI-Color LED	
Display for “H”	RED Sunlight Readable 8000 nits				RED Sunlight Readable 8000 nits			
Specification	1 Line of 20 Char (2”)				1 Lines of 40 Char (2”)			
Max. Viewable Distance	100 Feet with 2” Characters							
Power	15 watts		28 watts		30 watts		60 watts	
Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 12							
Operating Temp.	0° to 60° C Ambient							
Storage Temp.	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference	NEMA ICS 2-230 Showering Arc Test							
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Comm.	Port 1 RS232; Port 2 RS422/485							
External Dim.	36.9 ”x 4.8” x 2.8” (936.44 x 121.43 x 69.85mm)				72.1” x 5.4” x 2.8” (1831.31 x 106.35 x 69.85mm)			
Weight	4.5 lbs		4.8 lbs		8 lbs		8.5 lbs	

EZMarquee 1L20C and 1L40C Specs (Outdoor)



1 Line of 2", 20 Cha

EZMR-1L20C-OUT
EZMRH-1L20C-OUT



1 Line of 2", 20 Cha

EZMT-1L20COUT

1 Line of 2", 40 Characters per line

EZMR-1L40C-OUT
EZMRH-1L40C-OUT

1 Line of 2", 40 Characters per line

EZMT-1L40C-OUT

EZMarquee Model Specifications

Part Number	EZMR-1L20C-OUT	\$1099	EZMT-1L20C-OUT	\$1298	EZMR-1L40C-OUT	\$1759	EZMT-1L40C-OUT	\$1978
	EZMR-1L20C-E-OUT	\$1299	EZMT-1L20C-E-OUT	\$1499	EZMR-1L40C-E-OUT	\$1959	EZMT-1L40C-E-OUT	\$2179
	EZMR-1L20C-D-OUT	\$1299	EZMT-1L20C-D-OUT	\$1499	EZMR-1L40C-D-OUT	\$1959	EZMT-1L40C-D-OUT	\$2179
	EZMR-1L20C-P-OUT	\$1359	EZMT-1L20C-P-OUT	\$1559	EZMR-1L40C-P-OUT	\$2019	EZMT-1L40C-P-OUT	\$2279
	EZMRH-1L20C-OUT	\$1649			EZMRH-1L40C-OUT	\$2639		
	EZMRH-1L20C-E-OUT	\$1949			EZMRH-1L40C-E-OUT	\$2939		
	EZMRH-1L20C-D-OUT	\$1949			EZMRH-1L40C-D-OUT	\$2939		
	EZMRH-1L20C-P-OUT	\$2039			EZMRH-1L40C-P-OUT	\$3029		
Outdoor Model	RED LED		TRI-Color LED		RED LED		TRI-Color LED	
High-bright Model	RED Sunlight Readable 8000 nits				RED Sunlight Readable 8000 nits			
Specification	1 Line of 20 Char (2")				1 Lines of 40 Char (2")			
Max. Viewable Distance	100 Feet with 2" Characters							
Power	15 watts		28 watts		30 watts		60 watts	
Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 4X							
Operating Temp.	0° to 60° C Ambient							
Storage Temp.	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference	NEMA ICS 2-230 Showering Arc Test							
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Comm.	Port 1 RS232; Port 2 RS422/485							
External Dim.	36.9" x 4.8" x 2.8" (936.44 x 121.43 x 69.85mm)				72.1" x 5.4" x 2.8" (1831.31 x 106.35 x 69.85mm)			
Weight	4.5 lbs		4.8 lbs		8 lbs		8.5 lbs	

EZMarquee 2L20C and 2L40C Specs (Indoor)



2 Lines of 2", 20 Ch
1 Line of 4", 10 Ch

EZMR-2L20C EZMRH-2L20C



2 Lines of 2", 20 Ch
1 Line of 4", 10 Ch

EZMT-2L20C

2 Lines of 2", 40 Characters per line
1 Line of 4", 20 Characters per line

EZMR-2L40C EZMRH-2L40C

2 Lines of 2", 40 Characters per line
1 Lines of 4", 20 Characters per line

EZMT-2L40C

EZMarquee Model Specifications

Part Number	EZMR-2L20C	\$879	EZMT-2L20C	\$989	EZMR-2L40C	\$1599	EZMT-2L40C	\$1899
	EZMR-2L20C-E	\$978	EZMT-2L20C-E	\$1088	EZMR-2L40C-E	\$1698	EZMT-2L40C-E	\$1998
	EZMR-2L20C-D	\$978	EZMT-2L20C-D	\$1088	EZMR-2L40C-D	\$1698	EZMT-2L40C-D	\$1998
	EZMR-2L20C-P	\$1018	EZMT-2L20C-P	\$1128	EZMR-2L40C-P	\$1728	EZMT-2L40C-P	\$2028
	EZMRH-2L20C	\$1759			EZMRH-2L40C	\$3199		
	EZMRH-2L20C-E	\$1959			EZMRH-2L40C-E	\$3399		
	EZMRH-2L20C-D	\$1959			EZMRH-2L40C-D	\$3399		
	EZMRH-2L20C-P	\$2039			EZMRH-2L40C-P	\$3459		
Display for Indoor	RED LED		TRI-Color LED		RED LED		TRI-Color LED	
Display for “H”	RED Sunlight Readable 8000 nits				RED Sunlight Readable 8000 nits			
Specification	2 Lines of 20 Char (2”)				2 Lines of 40 Char (2”)			
Max. Viewable Distance	200 Feet with 4” Characters							
Power	30 watts		55 watts		54 watts		100 watts	
Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 12							
Operating Temp.	0° to 60° C Ambient							
Storage Temp.	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference	NEMA ICS 2-230 Showering Arc Test							
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Comm.	RS232/422/485							
External Dim.	36.86” x 5.67 ”x 2.75” (936.44 x 144.02 x 69.85mm)				72.1” x 5.67” x 2.75” (1831.31 x 144.02 x 69.85mm)			
Weight	8 lbs		8.5 lbs		15 lbs		16 lbs	

EZMarquee 2L20C and 2L40C Specs (Outdoor)



2 Lines of 2", 20 Ch
1 Line of 4", 10 Ch

EZMR-2L20C-OUT EZMRH-2L20C-OUT



2 Lines of 2", 20 Ch
1 Line of 4", 10 Ch

EZMT-2L20C-OUT

2 Lines of 2", 40 Characters per line
1 Line of 4", 20 Characters per line

EZMR-2L40C-OUT EZMRH-2L40C-OUT

2 Lines of 2", 40 Characters per line
1 Lines of 4", 20 Characters per line

EZMT-2L40C-OUT

EZMarquee Model Specifications

Part Number	EZMR-2L20C-OUT	\$1759	EZMT-2L20C-OUT	\$1978	EZMR-2L40C-OUT	\$3199	EZMT-2L40C-OUT	\$3798
	EZMR-2L20C-E-OUT	\$1959	EZMT-2L20C-E-OUT	\$2179	EZMR-2L40C-E-OUT	\$3399	EZMT-2L40C-E-OUT	\$3999
	EZMR-2L20C-D-OUT	\$1959	EZMT-2L20C-D-OUT	\$2179	EZMR-2L40C-D-OUT	\$3399	EZMT-2L40C-D-OUT	\$3999
	EZMR-2L20C-P-OUT	\$2039	EZMT-2L20C-P-OUT	\$2259	EZMR-2L40C-P-OUT	\$3459	EZMT-2L40C-P-OUT	\$4059
	EZMRH-2L20C-OUT	\$2639			EZMRH-2L40C-OUT	\$4799		
	EZMRH-2L20C-E-OUT	\$2939			EZMRH-2L40C-E-OUT	\$5099		
	EZMRH-2L20C-D-OUT	\$2939			EZMRH-2L40C-D-OUT	\$5099		
	EZMRH-2L20C-P-OUT	\$3059			EZMRH-2L40C-P-OUT	\$5199		
Oodoor Model	RED LED		TRI-Color LED		RED LED		TRI-Color LED	
High-bright Model	RED Sunlight Readable 8000 nits				RED Sunlight Readable 8000 nits			
Specification	2 Lines of 20 Char (2")				2 Lines of 40 Char (2")			
Max. View Dist.	200 Feet with 4" Characters							
Power	30 watts		55 watts		54 watts		100 watts	
Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 4X							
Operating Temp.	0° to 60° C Ambient							
Storage Temp.	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference/Tolerance	NEMA ICS 2-230 Showering Arc Test							
	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Comm.	RS232/422/485							
External Dim.	36.86" x 5.67 "x 2.75" (936.44 x 144.02 x 69.85mm)				72.1" x 5.67" x 2.75" (1831.31 x 144.02 x 69.85mm)			
Weight	8 lbs		8.5 lbs		15 lbs		16 lbs	

EZMarquee 4L20C and 4L40C Specs (Indoor)

4 Lines of 2", 20 Ch
2 Lines of 4", 10 Ch
1 Line of 6", 6 Ch
1 Line of 8", 5 Ch

EZMR-4L20C

EZMRH-4L20C

4 Lines of 2", 20 Ch
2 Lines of 4", 10 Ch
1 Line of 6", 6 Ch
1 Line of 8", 5 Ch

EZMT-4L20C

4 Lines of 2", 40 Characters Per line
2 Lines of 4", 20 Characters Per line
1 Line of 6", 12 Characters Per line
1 Line of 8", 10 Characters Per line

EZMR-4L40C

EZMRH-4L40C

4 Lines of 2", 40 Characters Per line
2 Lines of 4", 20 Characters Per line
1 Line of 6", 12 Characters Per line
1 Line of 8", 10 Characters Per line

EZMT-4L40C

EZMarquee Model Specifications

Part Number	EZMR-4L20C	\$1599	EZMT-4L20C	\$1899	EZMR-4L40C	\$2399	EZMT-4L40C	\$3299
	EZMR-4L20C-E	\$1698	EZMT-4L20C-E	\$1998	EZMR-4L40C-E	\$2498	EZMT-4L40C-E	\$3398
	EZMR-4L20C-D	\$1698	EZMT-4L20C-D	\$1998	EZMR-4L40C-D	\$2498	EZMT-4L40C-D	\$3398
	EZMR-4L20C-P	\$1728	EZMT-4L20C-P	\$2028	EZMR-4L40C-P	\$2548	EZMT-4L40C-P	\$3448
	EZMRH-4L20C	\$3199			EZMRH-4L40C	\$4799		
	EZMRH-4L20C-E	\$3399			EZMRH-4L40C-E	\$4999		
	EZMRH-4L20C-D	\$3399			EZMRH-4L40C-D	\$4999		
	EZMRH-4L20C-P	\$3459			EZMRH-4L40C-P	\$5099		
Display for Indoor	RED LED	TRI-Color LED		RED LED		TRI-Color LED		
Display for “H”	RED Sunlight Readable 8000 nits			RED Sunlight Readable 8000 nits				
Specification	4 Lines of 20 Char (2")			4 Lines of 40 Char (2")				
Max. View Dist.	400 Feet with 8" Characters							
Power	55 watts	100 watts		100 watts		180 watts		
Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 12							
Operating Temp.	0° to 60° C Ambient							
Storage Temp.	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference/ Tolerance	NEMA ICS 2-230 Showering Arc Test							
	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Comm.	Port 1 RS232; Port 2 RS422/485							
External Dim.	36.577" x 11.720" x 2.750" (929.06 x 297.69 x 69.85mm)			72.450" x 11.720" x 3.98" (1840.24 x 297.69 x 101.09mm)				
Weight	15 lbs	16 lbs		30 lbs		32 lbs		

EZMarquee 4L20C and 4L40C Specs (Outdoor)

4 Lines of 2", 20 Ch
2 Lines of 4", 10 Ch
1 Line of 6", 6 Ch
1 Line of 8", 5 Ch

EZMR-4L20C-OUT

EZMRH-4L20C-OUT

4 Lines of 2", 20 Ch
2 Lines of 4", 10 Ch
1 Line of 6", 6 Ch
1 Line of 8", 5 Ch

EZMT-4L20C-OUT

4 Lines of 2", 40 Characters Per line
2 Lines of 4", 20 Characters Per line
1 Line of 6", 12 Characters Per line
1 Line of 8", 10 Characters Per line

EZMR-4L40C-OUT

EZMRH-4L40C-OUT

4 Lines of 2", 40 Characters Per line
2 Lines of 4", 20 Characters Per line
1 Line of 6", 12 Characters Per line
1 Line of 8", 10 Characters Per line

EZMT-4L40C-OUT

EZMarquee Model Specifications								
Part Number	EZMR-4L20C-OUT	\$3199	EZMT-4L20C-OUT	\$3798	EZMR-4L40C-OUT	\$4799	EZMT-4L40C-OUT	\$6598
	EZMR-4L20C-E-OUT	\$3399	EZMT-4L20C-E-OUT	\$3999	EZMR-4L40C-E-OUT	\$4999	EZMT-4L40C-E-OUT	\$6799
	EZMR-4L20C-D-OUT	\$3399	EZMT-4L20C-D-OUT	\$3999	EZMR-4L40C-D-OUT	\$4999	EZMT-4L40C-D-OUT	\$6799
	EZMR-4L20C-P-OUT	\$3459	EZMT-4L20C-P-OUT	\$4059	EZMR-4L40C-P-OUT	\$5099	EZMT-4L40C-P-OUT	\$6899
	EZMRH-4L20C-OUT	\$4799			EZMRH-4L40C-OUT	\$7199		
	EZMRH-4L20C-E-OUT	\$5099			EZMRH-4L40C-E-OUT	\$7499		
	EZMRH-4L20C-D-OUT	\$5099			EZMRH-4L40C-D-OUT	\$7499		
	EZMRH-4L20C-P-OUT	\$5189			EZMRH-4L40C-P-OUT	\$7649		
Outdoor Model	RED LED		TRI-Color LED		RED LED		TRI-Color LED	
High-bright Model	RED Sunlight Readable 8000 nits				RED Sunlight Readable 8000 nits			
Specification	4 Lines of 20 Char (2")				4 Lines of 40 Char (2")			
Max. View Dist.	400 Feet with 8" Characters							
Power	55 watts		100 watts		100 watts		180 watts	
Approvals	UL, CUL, CE (File no. E209355)							
Enclosure	NEMA 4X							
Operating Temp.	0° to 60° C Ambient							
Storage Temp.	-40° to 95° C Ambient							
Humidity	10% to 95% RH, Non-Condensing							
Input Power	110/220 VAC, 47-63Hz							
Electrical Interference/Tolerance	NEMA ICS 2-230 Showering Arc Test							
	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test							
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis							
Shock	10G for under 12ms in the X, Y, and Z axis							
Serial Comm.	Port 1 RS232; Port 2 RS422/485							
External Dim.	36.577" x 11.720" x 2.750" (929.06 x 297.69 x 69.85mm)				72.450" x 11.720" x 3.98" (1840.24 x 297.69 x 101.09mm)			
Weight	15 lbs		16 lbs		30 lbs		32 lbs	