

Features

- Direct PC interface
- 12 inch flat panel monitor
- Panel or rack mount in Class I, DIV 2 areas
- Touchscreen options
- Antiglare and stainless options

Application


This product is a high-performance industrial flat panel monitor. It is designed as an operator interface device for continuous use in heavy-duty conditions.

It incorporates an industrial grade, high performance active matrix LCD panel, an optional touchscreen, and will connect directly to any DVI, VGA, or NTSC video signal.

It is available in many configurations.



Connection

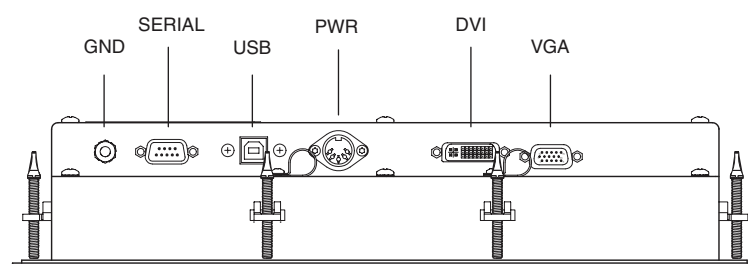



Supply	
Connection	180° 5-pin DIN
Input voltage	+ 12 V DC @ 1.2 A continuous
Indicators/operating means	
Display	
Type	5-wire resistive 5-wire hardened resistive Intrinsically safe 5-wire hardened resistive
Screen diagonal	12.1 inch
Response time	15 ms
Resolution	800 x 600 (native mode) , 640 x 480 (text mode) , SOG Maximum resolution: 1024 x 768 @ 60 Hz
Color depth	18 bit (262 K) color supported in any video mode
Contrast	600:1
Brightness	Standard: 400 nit
Reading angle	70° horizontal , 45° vertical (up), 55° vertical (down)
Life span	back lamp life: 50,000 hrs typical half life (replaceable)
MTBF	550000 h (see manual)
Input devices	15-pin VGA , 29-pin DVI Optional interface to NTSC (camera, live video) via standard BNC connector
Touchscreen	5-wire resistive 5-wire hardened resistive
Interface	
Interface type	RS-232 serial or USB port to host computer via standard cable
Directive conformity	
Electromagnetic compatibility	
Directive 89/336/EEC	EN55022A, EN61000-6-2, EN61000-3-2, EN61000-3-3
Low voltage	
Directive 73/23/EEC	EN60950
Ambient conditions	
Operating temperature	-20 ... 50 °C (-4 ... 122 °F) ambient, no active cooling devices required
Storage temperature	-20 ... 60 °C (-4 ... 140 °F)
Relative humidity	0 ... 90 %, non-condensing
Vibration resistance	5 ... 100 Hz , 1 g, 12 m/s ² , all axes
Impact resistance	30 g, 6 ms, all axes
Mechanical specifications	
Degree of protection	NEMA Type 4/12 (front face and seals). Type 4x with stainless option
Installation	panel or rack mount
Mass	4.7 kg
Dimensions	Outer bezel: 292 mm x 353 mm (11.5 x 13.9 inch) Front bezel thickness: 2.5 mm (0.10)
Overall depth	74 mm (2.9 inch) w/recessed cable ways
Cut out dimensions	259 mm X 320 mm (10.2 inch x 12.6 inch)
International approvals	
UL approval	E190294

Supplementary information

Statement of Conformity, Declaration of Conformity and instructions have to be observed. For information see www.pepperl-fuchs.com.

Release date 2018-12-21 15:19 Date of issue 2018-12-21 546929_eng.xml

Dimensions

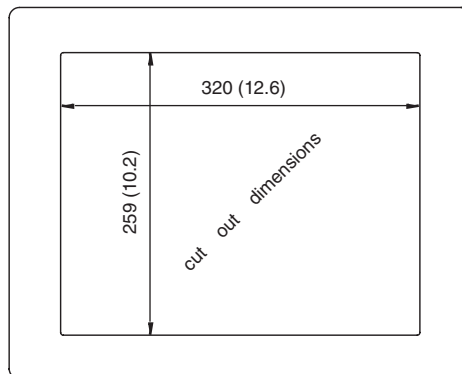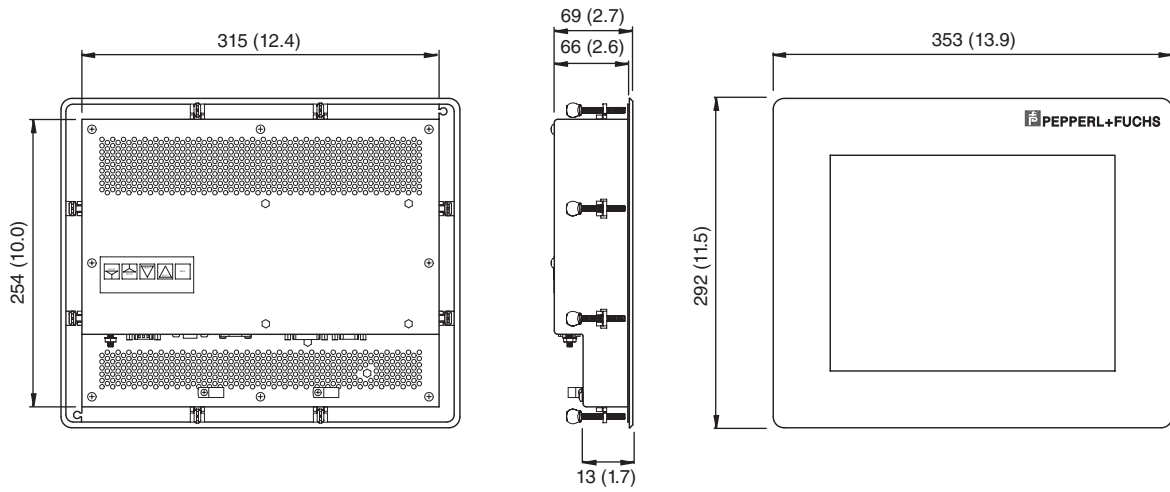

Accessories

- PS20-HZ
Power supply
- PSCBL*
Power cable
- SCBL*
Serial touchscreen cable
- UCBL*
USB touchscreen cable
- VCBL*
Video cable
- TSP12-5
Screen protector

Release date 2018-12-21 15:19 Date of issue 2018-12-21 546929_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Type code

