



# Technical Specification: ENFOPI Enclosure



## Outdoor Enclosures

Specifically designed for outdoor applications and sealed to IP65, the outdoor totem range is robust, fully weatherproof and aesthetically designed, without compromising functionality.

Totems are manufactured from heavy grade anti corrosive base material, welded for maximum strength and then powder coated in external grade paint (colour optional), giving durability and anti-vandal protection.

The access door is fitted with a 3 point front compression lock system that secures into the body of the housing. The door is fitted with a toughened glass viewing window with Anti Reflective coating as standard.

Inside the housing would be an internal portrait mount for the display, on our patent pending screen mounting system, that can move the display to either the front viewing window or to the rear of the housing, allowing the unit to accommodate high brightness, daylight readable screens, with depths up to 175mm, or standard depth screens for internal or semi outdoor usage.

A thermostatic cooling and heating system is available that covers the temperature range of -20 to 60C and an anti-condensation air curtain is provided as standard.

### Each unit comprises:

- Internal adjustable portrait display mount
- Thermostatic cooling system\*
- Thermostatic heating system\*
- Full width air curtain
- 4 point inlet and outlet filtered fans
- 3 High security locks
- 6mm thick toughened glass with AR coating
- Cable access panel

Model	EN46FOPI	EN55FOPI
Screen Size	46"	55"
Overall Dimensions (A x B x C) mm	1850 x 785 x 265	2050 x 860 x 265
Gross Weight	138KG	148KG
IP Certification	IP65 – IP55 with fan cooling	
Mounting	Freestanding	
Orientation	Portrait	

\*Other sizes available on request.



IP65




Outdoor



Colour Options

# Dimensions

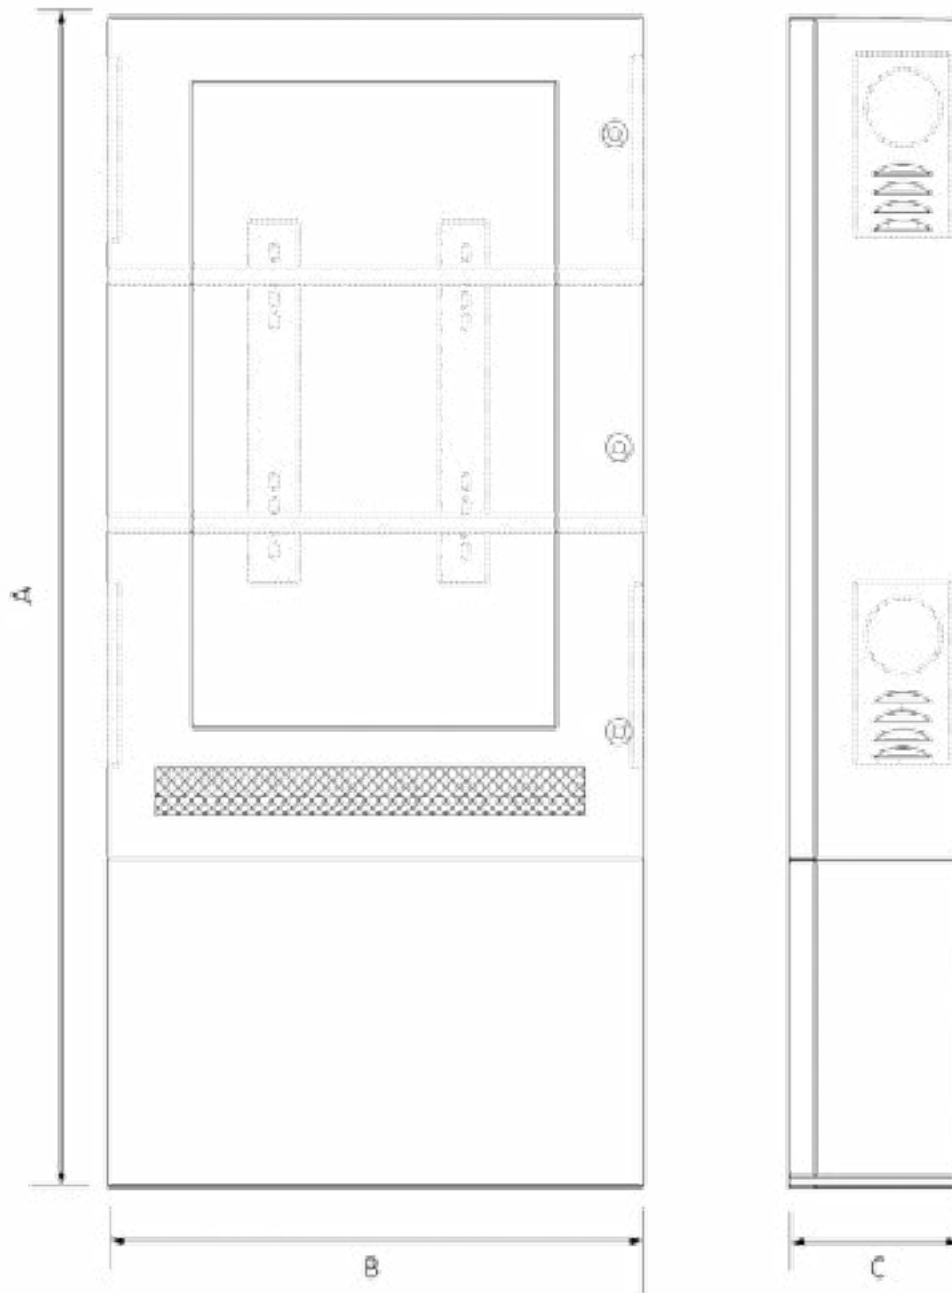

✉ info@uvudisplays.com

☎ 0161 222 0706

📍 Quay West, Trafford Wharf Rd, Manchester M17 1HH

www.uvudisplays.com