



VisuNet GXP PC Zone 2/22 (2020 Generation)

PC-GXP1200-22F*

- 21.5" (54.61 cm) display
- 16:9 aspect ratio widescreen formatting to match engineering stations
- PC solution with pre-installed Windows® operating system
- Lightweight design
- Full HD Resolution
- Completely modular system for easy field maintainability
- Flush or bezel mounting options
- IP66 rating for each individual component and entire system with housing
- Certified for ATEX and IECEx Zone 2/22
- UL listed for USA and Canada

VisuNet GXP PC Zone 2/22 (2020 Generation, Intel (R) Atom Apollo Lake Processor)



The VisuNet GXP PC (PC-GXP1100- 22F*/PC-GXP1200-22F*) is a lightweight modular operator workstation for use in hazardous locations according to ATEX and IECEx Zone 1/21 and Zone 2/22 as well as Class I and II, Division 2, and Class III.

The system assembly consists of three core components that are fieldreplaceable by the customer.

The display unit (DPU1100-*/DPU1200-*) is a hazardous-location rated display panel with an optional 10 finger multitouch sensor. The display and touchsensor are optically bonded with the hardened front glass.

The PC unit (PCU1100-*/PCU1200-*) is a hazardous-location rated computing unit that runs a pre-installed Microsoft Windows operating system. The PC unit allows users to install individual software packages such as SCADA applications to visualize and control their automation application. The power supply units (PSU1100-*/ PSU1200-*) are hazardous-location rated power supplies that provide the PCU and DPU devices with 24 V DC power.

As a standard mounting option, a bezel is available that allows the panel to be mounted into the system housing or into a cabinet (requires mounting kit). The panel can also be flush-mounted into a cabinet from the back with additional mounting brackets.

Technical Data

General specifications

Type	Personal Computer
------	-------------------

Hardware

Processor	Intel® Atom Apollo Lake E3940
RAM	8 GB
Mass storage	240 GByte industrial grade SSD optional: 480 GByte SSD

Supply

Power consumption	
AC	115/230 V AC, 0.4 ... 0.7 A, 50/60 Hz
DC	18 ... 36 V DC , 1.5 ... 3 A

Indicators/operating means

Display	
Type	Liquid Crystal Display (LCD) with LED backlight
Screen diagonal	54.61 cm (21.5 inch)
Resolution	1920 x 1080 pixels (Full HD) Aspect ratio 16:9
Color depth	24 bit (16.7 M) color
Contrast	5000:1 (typically)
Brightness	300 cd/m²
Reading angle	175° in all directions
Life span	back lamp life: 50.000 hrs typical half life , at 25 °C (77 °F)

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Input devices	
Touchscreen	optional: projective capacitive; 10 finger multi-touch, glove friendly
Keyboard	Foil keyboard with different pointing device options available (see EXTA2 datasheet)
Interface	
Interface type	Standard: 1 x Ethernet 100/1000BASE-TX (Ex e) or 1 x fiber optic 1000BASE-SX (Multimode) or 1 x fiber optic 1000BASE-LX (Singlemode), 1 x USB 2.0 (Ex e), 2 x USB 1.1 (Ex i; intended for Pepperl+Fuchs keyboard and mouse), 1 x DC or AC power in (via power supply unit) Optional: 1 x barcode reader interface Pepperl+Fuchs Pscan-D/B (Ex i) "interface 3": 1 x barcode reader interface for wired 1-D scanners IDM-160-D*, IDM-Z1-160-D-* and base station IDMX61-B-* and IDM-Z1-x61-B-* (Ex i) "interface 4": 1 x barcode reader interface for wired 2-D Scanner IDM-Z1-260-D-* (Ex i) "interface 5": 1 x RS-232 interface with Power Supply for miscellaneous devices and peripherals (Ex i) 1 x RS-232 (Ex e) 1 x RS-485 (Ex e) 1 x Ethernet 100/1000Base-TX (Ex e) Bluetooth v4.0, communication distance up to 30 m in open terrain, transmission power +8 dBm, transmission frequency 2.402 ... 2.48 GHz
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations) non-Bluetooth products only
Radio and telecommunication terminal equipment	
Directive 2014/53/EU	EN 301 328 V2.1.1 EN 301 489-1 V2.1.1 EN 301 489-17 V3.1.1 Bluetooth products only
RoHS	
Directive 2011/65/EU (RoHS)	EN 50581:2012-09
Software	
Operating system	Microsoft® Windows® 10 IoT Enterprise 2019 LTSC (x64)
Ambient conditions	
Operating temperature	-20 ... 50 °C (-4 ... 122 °F) Display might react sluggishly below 0 °C
Storage temperature	-20 ... 60 °C (-4 ... 140 °F)
Relative humidity	93% at 40°C, non-condensating, according to EN60068-2-78
Altitude	Operating altitude max. 2000 m
Shock resistance	18 shocks 15 g , 11 ms all axis, IEC 60068-2-27
Vibration resistance	10 ... 150 Hz, +/- 0.075 mm , 1g, 10 cycles per axis according to EN60068-2-6
Mechanical specifications	
Degree of protection	IP66 (individual components and entire system with housing)
Material	Internal: - Panel: anodized aluminum (TCU, PCU, PSU), powder coated aluminum (DPU) External: - Bezel: stainless steel AISI 304 (1.4301) - System housing H4: stainless steel AISI 304 (1.4301), bead blasted, typical surface roughness Ra = 1.6 µm
Installation	Flush-mount installation (requires customized mounting kit) Panel-mount installation into system housing with bezel Panel-mount installation into cabinet with Bezel and standard mounting kit
Mass	Panel (DPU with bezel, TCU, PSU DC): approx. 17.5 kg Panel (DPU with bezel, TCU, PSU AC): approx. 18 kg System housing: approx. 11 kg
Dimensions	Panel (DPU with bezel, TCU, PSU DC): 625 mm x 459 mm x 120 mm Panel (DPU with bezel, TCU, PSU AC): 625 mm x 459 mm x 137 mm Panel with system housing: 625 mm x 459 mm x 173 mm Panel cut-out dimensions: 583 mm x 417 mm (installation surface)

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t193761_eng.pdf

Technical Data

Data for application in connection with hazardous areas

EU-type examination certificate	BVS 17 ATEX E 037 X
Marking	Ⓜ II 3G Ex ec [ib] q IIC T4 IP66 Gc Ⓜ II 3D Ex tc [ib] IIIC T85 °C IP66 Dc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013, EN 60079-7:2015, EN 60079-11:2012, EN 60079-31:2014
International approvals	
UL approval	E492874
Approved for	Class I, Division 2, Groups A, B, C, D T4; Zone 2, Group IIC T4 Class II, Division 2, Groups F, G T4; Zone 22, Group IIIB T85 Class III; Zone 22, Group IIIA T85
IECEX approval	IECEX BVS 17.0029X
Approved for	Ex ec [ib] q IIC T4 IP66 Gc Ex tc [ib] IIIC T85 °C IP66 Dc
Standards	IEC 60079-0:2011, IEC 60079-7:2015, IEC 60079-11:2011, IEC 60079-31:2013

Accessories


	DATL-FO-SM-LC-LC-15	Fiber Optic Single-Mode Breakout Cable
	DATL-FO-SM-LC-SC-15	Fiber Optic Single-Mode Breakout Cable
	PCU1200-*	Personal Computer Unit
	DPU1200-J2-22F*	Display Unit
	PSU1200-J2-AC-N0	AC Power Supply
	PSU1200-J2-DC-N0	DC Power Supply
	EXTA2-*-K3*	Ex i keyboard with trackball
	EXTA2-*-K4*	Ex i keyboard with touchpad
	EXTA2-*-K6*	Ex i keyboard with joystick
	Mounting Options	
	VISUNET-CONTROL-CENTER	Additional Management tool for VisuNet Remote Monitors and Box Thin Clients
	VISUNET-RM-SHELL5	Thin Client Firmware for VisuNet Remote Monitors and Box Thin Clients
	VISUNET-RM-SHELL5-CC	VisuNet Control Center License Key for RM Shell 5
	VISUNET-RM-SHELL5-DRDC	DRDC License Key for RM Shell 5

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t193761_eng.pdf


Accessories

	VISUNET-RM-SHELL5-PRO	PRO License Key for RM Shell 5
	DATL-FO-MM-*	Fiber Optic Multi-Mode Breakout Cable
	1002MC-SX	Gigabit Industrial Media Converter
	IDM-Z1-x61-B-J1-BT-N0	Base station for Zone 1/21
	IDM-Z1-x60-D-*	Corded 1-D and 2-D Handheld Reader for Zone 1/21
	IDM-Z1-x61-M-*	Bluetooth 1-D and 2-D Handheld Reader for Zone 1/21
	DATL-IDM-DB-S-XX00-N0	1 m connector cable for corded handheld reader with M12 connector to open cable end
	SCANNER-HOLDER-U1-XX00-N0	Stainless steel holder for for IDM-Z1- handheld readers, compatible with AG-XX00 housing
	HOLDER-BRACKET-XX00-IDMx61-B-N	Stainless steel bracket to mount IDMx61-B-J1-BT-N0 base station to AG-XX00 housing
	PCU1200-* (Intel (R) Atom Apollo Lake Processor)	Personal Computer Unit

Dimensions

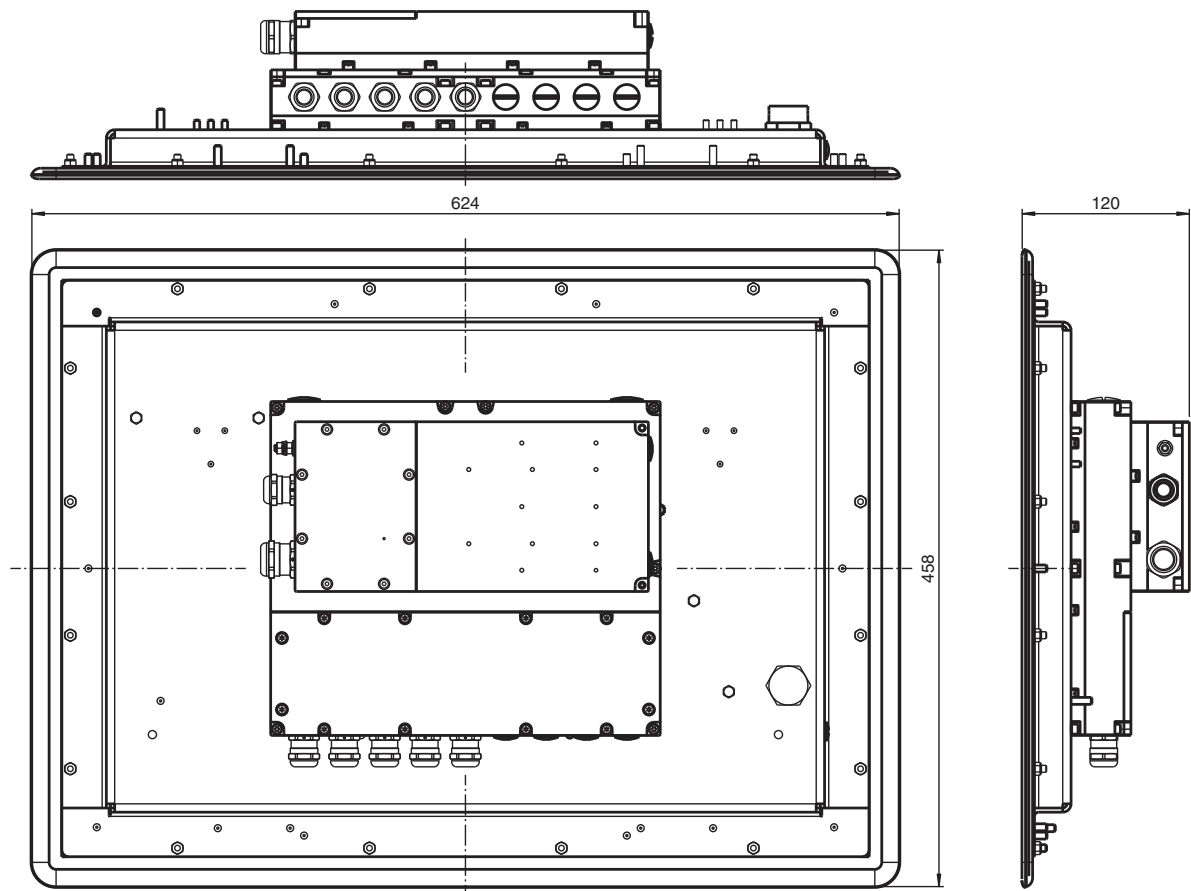

Mounting Example: Enclosure, Pedestal, External Keyboard

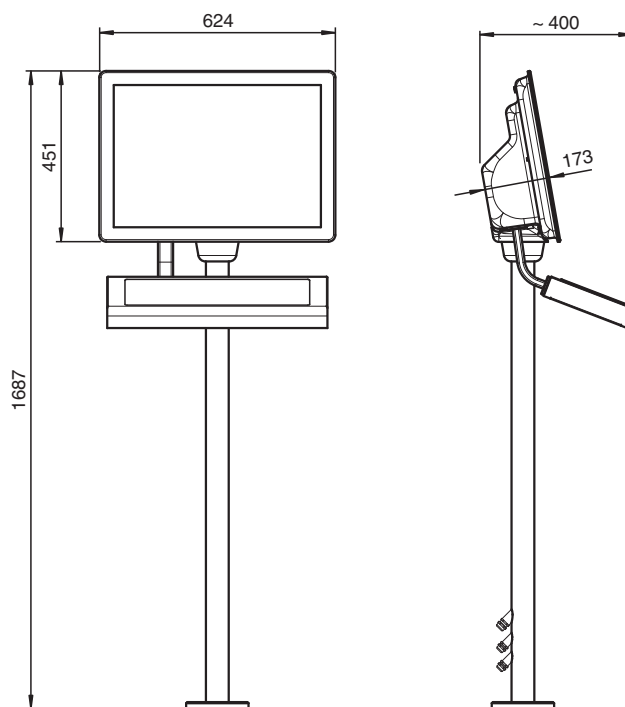

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t193761_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Type Code VisuNet PC-GXP1100-22F*/PC-GXP1200-22F*

Model	Display Unit	Front Glass & Touch	Interfaces	Power Supply Unit	Interfaces	Module A	Module B	Computing Platform	Housing	Options	
Model											
PC-GXP1100-	VisuNet GXP Personal Computer System; Zone 1/21										
PC-GXP1200-	VisuNet GXP Personal Computer System; Zone 2/22										
	Display Unit										
	22F	21.5 inch (16:9), Full HD (1920 x 1080)									
		Front Glass & Touch									
	N	Anti-glare security glass, no touch									
	C	Anti-glare security glass, projective capacitive 10-finger multitouch									
		Interfaces									
	1-	5 x capacitive system front keys									
	2-	5 x capacitive system front keys and Bluetooth interface									
		Power Supply Unit									
	D-	18 ... 36 V DC									
	A-	115/230 V AC, 50/60 Hz									
		Interfaces									
	E	1 x 1000BASE-T LAN Ex e, 1x USB Ex e, 2x USB Ex i									
	S	1 x 1000BASE-SX fiber optic (Multimode), 1x USB Ex e, 2x USB Ex i									
	L	1 x 1000BASE-LX fiber optic (Singlemode), 1x USB Ex e, 2x USB Ex i									
		Module A									
	N	No additional interface module									
	B	1 x TTY Ex i for barcode reader PSCAN-D/EX-Dragon and base station PSCAN-B									
	1	1 x RS-232 Ex e									
	2	1 x RS-485 Ex e									
	3	1 x RS-232 Ex i for barcode readers IDM160-* and IDMX61-B-*									
	4	1 x Ex i interface for wired 1-D barcode readers IDM-160-D*, IDM-Z1-160-D-* and base station IDMX61-B-* and IDM-Z1-x61-B-*									
	5	1 x RS-232 Ex i interface for miscellaneous devices and peripherals									
	E	1 x 1000BASE-T LAN Ex e									
		Module B									
	N	No additional interface module									
	B	1 x TTY Ex i for barcode reader PSCAN-D/EX-Dragon and base station PSCAN-B									
	1	1 x RS-232 Ex e									
	2	1 x RS-485 Ex e									
	3	1 x Ex i interface for wired 1-D barcode readers IDM-160-D*, IDM-Z1-160-D-* and base station IDMX61-B-* and IDM-Z1-x61-B-*									
	4	1 x Ex i interface for 2-D barcode readers IDM-Z1-260-D-*									
	5	1 x RS-232 Ex i interface for miscellaneous devices and peripherals									
	E	1 x 1000BASE-T LAN Ex e									
		Computing Platform									
	P3-	Intel® Atom Apollo Lake E3940, 8 GB RAM, 240 GB SSD, Windows 10 IoT Enterprise LTSC x64									
	P4-	Intel® Atom Apollo Lake E3940, 8 GB RAM, 480 GB SSD, Windows 10 IoT Enterprise LTSC x64									
		Housing									
	NN-	No bezel, prepared for flush mounting									
	S1-	Bezel; prepared for panel mounting or into AG-XX00 housing									
	H4-	Installed into GXP Housing AG-XX00 (SS304), front opening, surface finish 1,6µm bead blasted									
		Options									
	N0-	Standard, no options									

Example: PC-GXP1100-22FN1-D-ENNP1-S2-N0

Release date: 2021-01-12 Date of issue: 2021-01-12 Filename: t193761_eng.pdf