




Features

- HMI Panel PC w/ Class B Certified
- Low Power Consumption N2930 Processor
- 10.1" 1280X800 LCD w/P-Cap Touch
- Door Display w/ PoE & 9-36VDC Input.
- Plenty of I/O, 2 x LAN, 1 x RS232/422/485, 2 x USB3.0, 1 x HDMI, 1 x VGA
- Rear Power Bottom for Easy Control

Specification


Product		WLP-7B21-10 CSPT
Main System	CPU	Intel® Celeron N2930 Processor
	Graphic	Intel® Integrated HD Graphics
	Memory	One 1333 MHz DDR3L SODIMM Socket, up to 8GB
	OS Support	Optional: Windows 7 embedded, Windows 7 pro (64bit, 32 bit) Windows 8 embedded, Windows 8 industrial (64bit), Windows 10
Display	Size	10.1", 16:10
	Resolution (pixel)	1280 x 800
	Number of Colors	16.7M Colors
	View Angle (H/V)	170(H) / 170(V)
	Brightness(cd/m ² , nit)	350 nits
	Contrast Ratio	800:1 (Typ)
Touch Panel	Type	Chassis Projective Capacitive Touch Panel
	Light Transmission	90 ± 3%
	Lifetime	3,500,000 Times
Storage & Expansion	Storage	mSATA Support 32GB, 64GB, 128GB
	Expansion	Mini-PCIe 52 pin Card-Edge Type, Half Size
I/O Ports	USB	USB 3.0 x 2
	COM	RS-232/422/485 x 1
	LAN	2 x RJ-45
	Audio	Line Out, 3.5mm Phone Jack x 1, 1.5W Speaker x 1
	Video	HDMI 1.4a, A Type x 1 / VGA D-sub x 1
	Control Keys	Rear Bottom: Power on /off
Power	Power Input	9~36 VDC-in x 1
	Power Adapter	External, 63 Watts, Universal 100 ~240V AC in, 12V DC Out
Environmental	Temperature	Operating Temperature: 12V DC Input 0~50°C (IEC60068-2-56, air flow cooling) Storage Temperature: -20~60°C
	Humidity	Operating & Storage: -10 ~ 90%, non-condensing
	Water/Dust resistance	IP65 at Front
Mechanical Characteristics	Housing	Sliver Bezel / Black Cover
	Dimensions (Net: mm)	263.3 (H) x 171 (V) x 35.7 (T)
	Weights (Net: kg)	1.25 kg
	Mounting	Chassis, VESA (75x75)
Certification	CE/ FCC/ VCCI Class B	

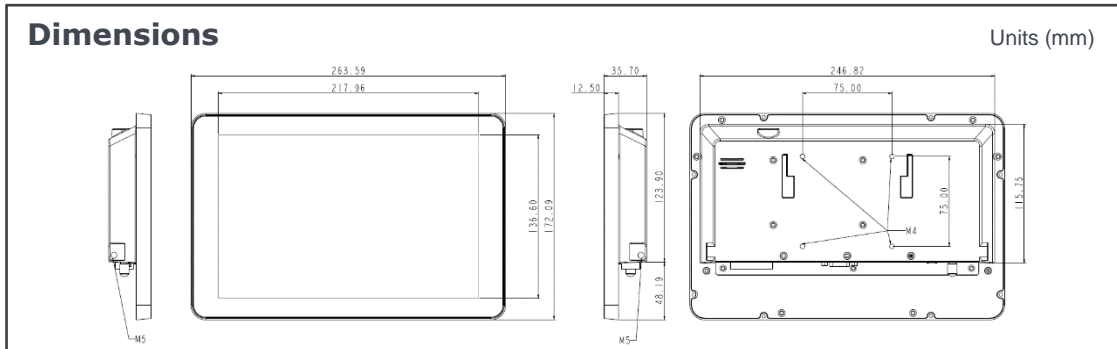

Major Options	
Add On Parts	① 802.11 ac/a/b/g/n WLAN + Bluetooth 4.1 Module (not Coexist with PoE) ② PoE Module (not coexist with wireless, COM Port and TPM, remove AC-DC Power Adapter and DC Input Connector) ③ TPM v2.0 by Module (not Coexist with PoE) ④ Wall Mount Bracket
Customized	① Webcam ② RFID ③ COMx2 ④ Panel Mount Kit ⑤ White Rear Cover ⑥ Car Ignition Control

Order Information

Item	Touch	Description
WLP-7B21-10 (CSPT)	Chassis P-Cap.Touch	10.1" N2930 1.83GHz, DDR3L 2G RAM, 64G mSATA, Full flat P.Cap Touch

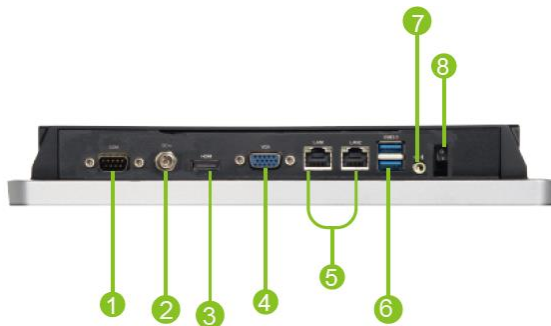

- ① COM
- ② DC-in
- ③ HDMI out
- ④ VGA out
- ⑤ LAN x 2
- ⑥ USB 3.0 x 2
- ⑦ Line out
- ⑧ Power switch

